

MODEL 2130

EXCESS FLOW VALVE




The Model 2130 Excess Flow Valve is designed for use in liquid, gas or vapor service to stop the flow in the event of a sudden flow change. The 2130 model has male NPT connections on the inlet side and female NPT connections on the outlet side. These valves offer excellent flow rates and can be used in many different applications. Internal components are also available in ceramic. Wrench flats are included.

NPS	2130	2140	2150	2160	2170	2155	2180
0.75"	4.00"	4.00"	4.00"	4.00"	4.00"	6.00"	4.00"
1	4.00	4.00	4.00	4.00	4.00	6.00	4.00
1.5	4.50	4.50	4.50	4.50	4.50	6.50	4.50
2	5.63	5.63	5.63	5.63	5.63	7.63	5.63
3	7.25	7.25	7.25	7.25	7.25	9.25	7.25
4	9.00	9.00	9.00	9.00	9.00	11.00	9.00

These dimensions are for standard designs as reference only.
Valves can be custom-engineered as needed.

Typical dimensions are listed. Data contained herein can be altered to accommodate design changes and changes to increase performance. Information on this page is the sole property of L6 Inc. d/b/a Total Valve Systems

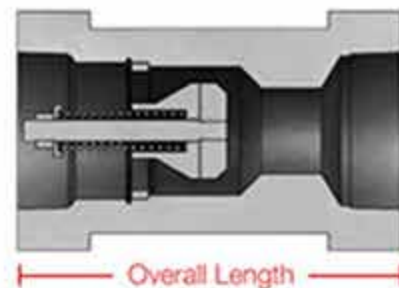

Basic options include carbon steel bodies & stainless internals with other materials & pressure classes available upon request.